

VOK-T 150/120




Back Shutter



Mounting Bracket




Dimensions /mm/

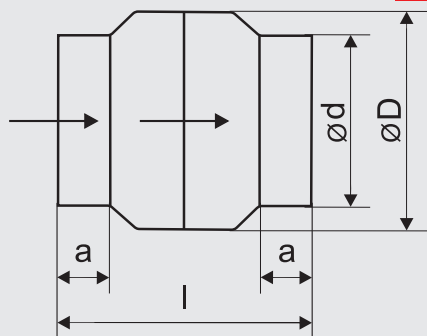

| Type | a | l | Ød | ØD |
|---------|----|-----|-----|-----|
| 150/120 | 28 | 150 | 120 | 150 |



Performance curves

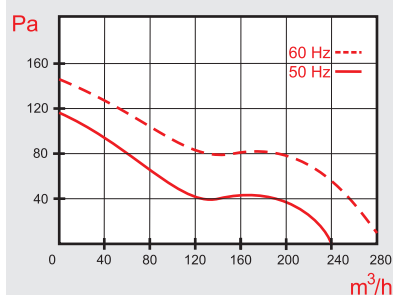

High Temperature resistant fan blade made of Glass Filled Polyamide

Technical characteristic

| Supply Voltage | Maximum Flow Rate | Consumed power | Maximum Flow rate | Max static pressure | Consumed current | Protection Degree | Noise Level | Weight | Max Air t° | Product Code | With Back Shutter Accessory |
|----------------|-------------------|----------------|-------------------|---------------------|------------------|-------------------|-------------|--------|------------|--------------|-----------------------------|
| Hz / V | min ⁻¹ | W | m³/h | Pa | A | IP | dB | Kg | °C | No | No |
| 50 / 230 | 2650 | 46 | 240 | 110 | 0,385 | 44 | 51 | 1,300 | +150 | 2457 | 2495 |
| 50 / 115 | 2650 | 45 | 240 | 110 | 0,721 | 44 | 51 | 1,300 | +150 | - | 7490 |
| 50 / 12 | 2650 | 46 | 240 | 110 | 3,500 | 44 | 51 | 1,300 | +150 | - | - |
| 60 / 120 | 3320 | 54 | 275 | 130 | 0,714 | 44 | 53 | 1,300 | +150 | - | - |

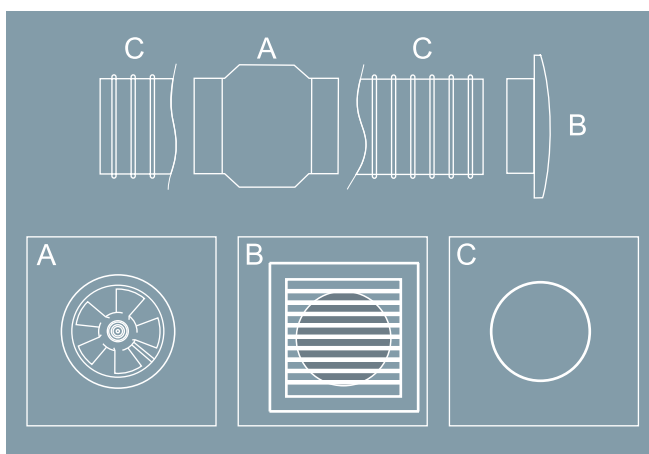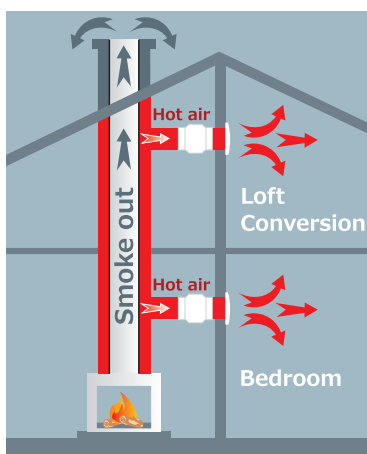

THERMOSTAT

MOUNTING BRACKET

| Product Code | Product Code |
|-----------------------------|--------------|
| 2464 | - |
| With Back Shutter Accessory | - |
| 50Hz/230V | - |
| 2891 | - |



Trickle Impregnation Technology

- Sealed motor against dust and moisture
- High temperature resistant electric motor
- Maximum isolation characteristics
- Longevity of the electric motor



- All VOK series fans can be produced with length "l" to suit most specific requirements of our customers.
- All fans can be manufactured to operate at 60 Hz frequency, without significant change in the remaining characteristics.
- Products without a code are custom made.